


Halls Stockless Anchor Type A

The Hall anchor is the most commonly used conventional stockless anchor and it is one of the most popular anchors designed to fit anchor pockets on most ships. The Hall anchor is suitable for general use and perfect for sand and shale sea beds.

The Hall anchor is certified by all major class authorities and can be supplied in a black or galvanised finish.

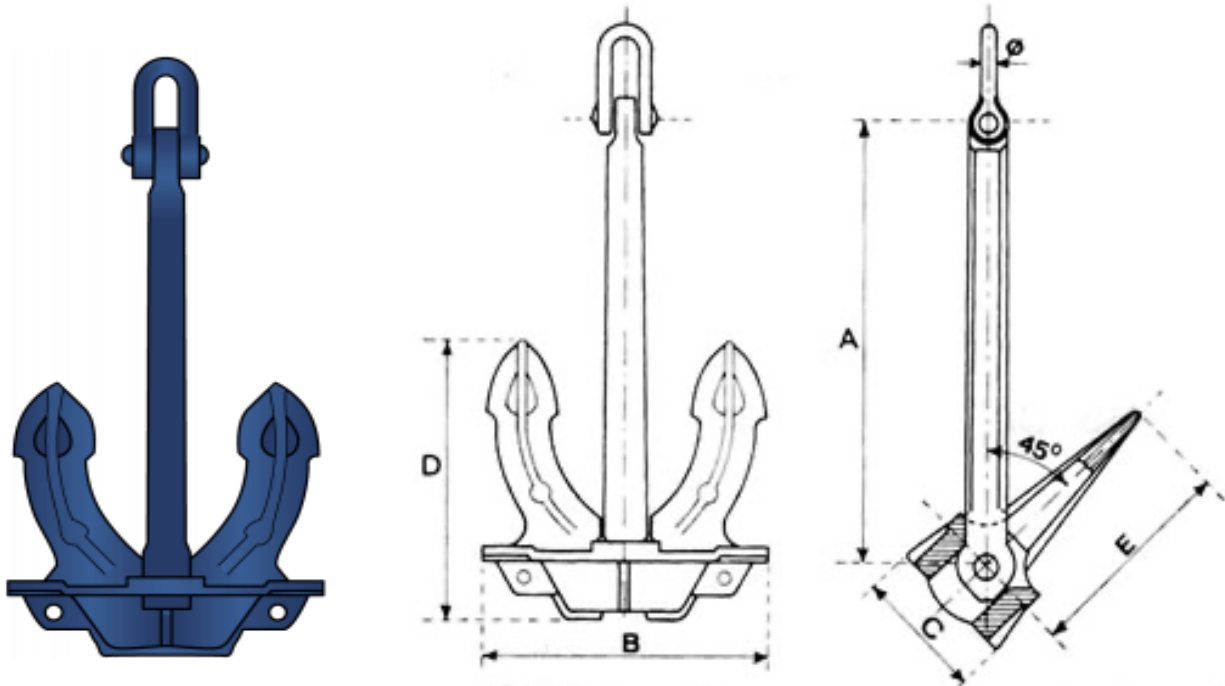

Weight (KG)	Dimensions				
	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)
40	557	430	198	370	198
60	637	492	227	423	227
100	760	582	270	500	270
125	814	629	290	540	290
150	866	670	308	573	308
180	919	710	327	610	327
240	1019	784	361	673	361
300	1095	844	388	725	388
360	1160	898	412	768	412
420	1222	946	434	805	434
480	1282	988	454	842	454
570	1356	1042	481	893	481
660	1422	1096	506	938	506
780	1506	1160	535	991	535
900	1580	1220	560	1043	560
1020	1645	1268	584	1086	584
1140	1705	1319	605	1129	605
1290	1778	1374	630	1176	630
1440	1844	1430	655	1220	655
1590	1906	1475	677	1261	677
1740	1966	1517	698	1302	698
1920	2031	1568	722	1345	722
2100	2093	1614	743	1385	743
2280	2150	1657	763	1420	763

Weight (KG)	Dimensions				
	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)
2460	2207	1700	784	1456	784
2640	2259	1741	801	1489	801
2850	2318	1787	822	1528	822
3060	2374	1832	841	1565	841
3300	2432	1880	862	1605	862
3540	2490	1926	883	1644	883
3780	2547	1965	902	1678	902
4050	2610	2008	924	1715	924
4320	2661	2051	943	1751	943
4590	2712	2093	962	1787	962
4890	2769	2135	984	1827	984
5250	2836	2185	1008	1872	1008
5610	2899	2234	1031	1914	1031
6000	2965	2284	1054	1957	1054
6450	3037	2340	1080	2005	1080
6900	3100	2393	1105	2050	1105
7350	3173	2444	1129	2094	1129
7800	3235	2493	1152	2137	1152
8300	3303	2545	1176	2181	1176
8700	3355	2585	1195	2215	1195
9300	3430	2643	1222	2265	1222
9900	3502	2699	1248	2313	1248
10500	3571	2752	1273	2359	1273
11100	3638	2803	1297	2446	1297