


Kenter Joining Shackle

The Kenter Type Joining Shackle is a lugless joining shackle or lugged joining shackle used to join 'common chain links'. The Kenter Shackle consists of two separate halves that are securely joined together with a centre chock and taper pin.

Generally supplied with LR class certification. Other third-party classification available upon request. Can be supplied in both black & galvanised.

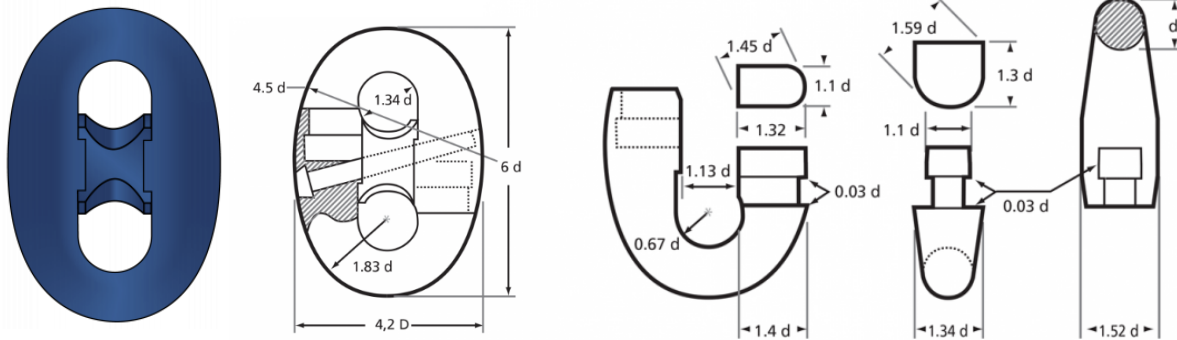

All dimensions are approximate
d = Diameter

	GRADE U2		GRADE U3		
Diameter (mm)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Weight (kg)
12.5	6.73	9.38	9.38	13.46	0.54
14	8.36	11.83	11.83	16.83	0.6
16	10.91	15.30	15.30	22.03	0.7
17.5	12.95	18.25	18.25	26.10	0.9
19	15.30	21.52	21.52	30.69	1.2
20.5	17.85	24.88	24.88	35.59	1.4
22	20.39	28.55	28.55	40.89	1.7
24	24.17	33.85	33.85	48.74	2.2
26	28.35	39.67	39.67	56.70	2.6
28	32.73	45.79	45.79	65.47	3.3
30	37.53	52.41	52.41	74.95	4.2
32	42.52	59.45	59.45	84.94	5.1
34	47.72	66.79	66.79	95.55	5.8
36	53.33	74.64	74.64	107.07	7.2
38	59.25	82.80	82.80	121.35	7.8
40	65.26	91.37	91.37	130.52	9.5
42	71.69	100.03	100.03	142.76	11.2
44	78.42	110.13	110.13	157.04	12.6
46	85.35	119.31	119.31	171.31	14.0
48	92.59	129.50	129.50	184.57	16.3
50	100.03	139.70	139.70	199.86	18.6
52	108.09	150.92	150.92	215.16	20.0
54	116.25	162.13	162.13	231.48	22.6
56	124.41	174.37	174.37	247.79	26.2
58	131.54	184.57	184.57	265.13	28.9
60	140.72	197.82	197.82	282.46	32.4
62	149.90	210.06	210.06	299.80	35.2
64	159.08	223.32	223.32	319.17	39.2

	GRADE U2		GRADE U3		
Diameter (mm)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Weight (Kg)
66	169.27	235.55	235.55	336.51	42.0
68	178.45	249.83	249.83	356.90	46.0
70	187.63	263.09	263.09	376.28	52.3
73	202.92	284.50	284.50	406.87	58.3
76	219.24	306.93	306.93	438.48	65.8
78	230.46	322.23	322.23	458.87	72.6
81	245.75	344.66	344.66	491.50	78.0
84	263.09	368.12	368.12	526.17	90.0
87	280.42	392.59	392.59	560.84	96.0
90	297.76	417.06	417.06	595.51	105.0
92	309.99	434.40	434.40	619.99	118.0
95	329.37	459.89	459.89	656.70	125.0
97	340.59	477.23	477.23	682.19	135.0
100	359.96	503.74	503.74	719.92	150.0
102	373.22	522.09	522.09	746.43	158.0
105	392.59	549.63	549.63	785.18	169.0
107	405.85	567.98	567.98	811.69	180.0
111	433.38	605.71	605.71	864.72	192.0
114	452.75	635.28	635.28	906.53	207.0
117	474.17	663.84	663.84	948.34	225.0
120	494.56	694.43	694.43	991.16	256.0
122	509.86	713.80	713.80	1018.7	263.0

Additional sizes available upon request