



Grade 'S' Safety Bow Shackle Galvanised

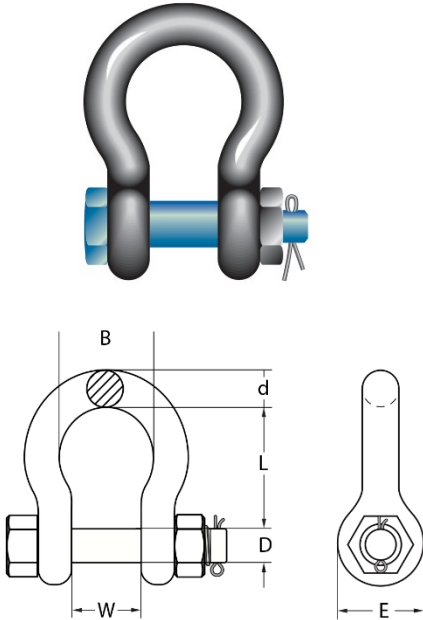

WLL (Te)	d Diameter (mm)	B (mm)	D (mm)	E (mm)	L (mm)	W (mm)	Weight (kg)
1	10	27	11	25	37	18	0.16
1.5	11	29	13	27	43	19	0.22
2	13	33	16	33	48	21	0.36
3.2	16	43	19	40	61	27	0.76
4.7	19	51	22	48	82	32	1.23
6.5	22	58	25	54	84	37	1.79
8.5	25	68	29	60	95	43	2.78
9.5	29	74	32	67	108	46	3.75
12	32	83	35	76	119	52	5.31
13.5	35	92	38	84	133	57	6.98
17	38	98	44	92	146	60	9.44
25	44	127	51	110	178	73	15.39
35	51	146	57	127	197	83	23.71
42.5	57	160	63	143	222	95	29.01
55	63	184	70	152	267	105	44.58
85	76	200	83	165	330	127	75.0
120	89	241	95	203	381	133.5	129.31
150	102	279	108	229	432	145	165.9

All dimensions are approximate

Grade 'S' Screw Pin Bow Shackle Galvanised

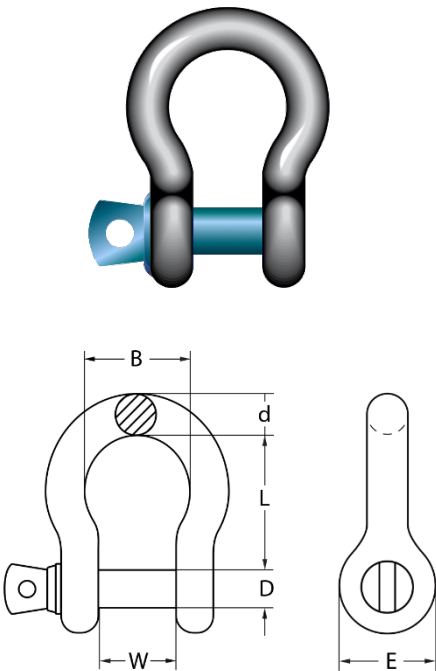

WLL (Te)	d Diameter (mm)	B (mm)	D (mm)	E (mm)	L (mm)	W (mm)	Weight (kg)
0.33	5	15	6	14	22	10	0.02
0.5	6	20	8	17	29	12	0.05
0.75	8	21	10	21	31	13	0.09
1	10	26	11	25	37	17	0.14
1.5	11	29	13	27	43	18	0.17
2	13	33	16	33	48	21	0.29
3.2	16	43	19	40	61	27	0.63
4.7	19	51	22	48	72	32	1.02
6.5	22	58	25	54	84	37	1.53
8.5	25	68	29	60	95	43	2.41
9.5	29	74	32	67	108	46	3.09
12	32	83	35	76	119	52	4.31
13.5	35	92	38	84	133	57	6.01
17	38	98	44	92	146	60	8.03
25	44	127	51	110	178	73	13.79
35	51	146	57	127	197	83	20.42
42.5	57	160	63	143	222	95	26.06
55	63	184	70	152	267	105	38.8