
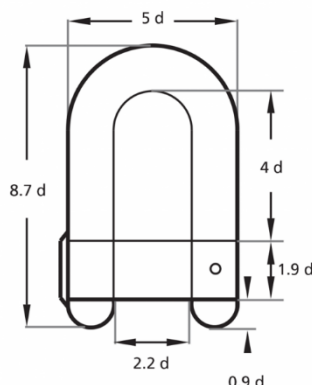


Anchor 'D' Type Joining Shackle

The Anchor Joining Shackle, commonly known as the end shackle is generally used to connect the crown shackle of the anchor to the swivel forerunner of the chain.

The pin of the anchor shackle is made of an oval cross-section and is fixed in unloading with a positioning pin which provided added strength to the shackle.



	GRADE U2		GRADE U3		
d Diameter (mm)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Weight (kg)
12.5	6.73	9.38	9.38	13.46	1.34
14	8.36	11.83	11.83	16.83	1.5
16	10.91	15.30	15.30	22.03	1.6
17.5	12.95	18.25	18.25	26.10	2.0
19	15.30	21.52	21.52	30.69	2.6
20.5	17.85	24.88	24.88	35.59	3.2
22	20.39	28.55	28.55	40.89	4.1
24	24.17	33.85	33.85	48.54	5.2
26	28.35	39.67	39.67	56.70	6.7
28	32.73	45.79	45.79	65.47	8.2
30	37.53	52.41	52.41	74.95	10.0
32	42.52	59.45	59.45	84.94	12.0
34	47.72	66.79	66.79	95.55	15.0
36	53.33	74.64	74.64	107.07	17.0
38	59.25	82.80	82.80	118.29	20.0
40	65.26	91.26	91.26	130.52	23.0
42	71.69	100.03	100.03	142.76	28.0
44	78.42	110.13	110.13	157.04	31.5
46	85.35	119.31	119.31	171.31	36.0
48	92.59	129.50	129.50	184.57	41.0
50	100.03	139.70	139.70	199.86	47.0
52	108.09	150.92	150.92	215.16	52.5
54	116.25	162.13	162.13	231.48	60.0
56	124.41	174.37	174.37	247.79	64.0
58	131.54	184.57	184.57	265.13	71.0
60	140.72	197.82	197.82	282.46	78.0
62	149.90	210.06	210.06	299.80	86.0
64	159.08	223.32	223.32	319.17	95.0

	GRADE U2		GRADE U3		
d Diameter (mm)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Weight (kg)
66	169.27	235.55	235.55	336.51	103.0
68	178.45	147.86	249.83	356.90	114.0
70	187.63	263.09	263.09	376.28	125.0
73	202.92	284.50	284.50	406.87	141.0
76	219.24	306.93	306.93	438.48	152.0
78	230.46	322.23	322.23	458.87	171.0
81	245.75	344.66	344.66	491.50	192.0
84	263.09	368.12	368.12	526.17	214.0
87	280.42	392.59	392.59	560.84	236.0
90	297.76	417.06	417.06	595.51	265.0
92	309.99	434.40	434.40	619.99	285.0
95	329.37	459.89	459.89	656.70	305.0
97	340.59	477.23	477.23	682.19	335.0
100	359.96	503.74	503.74	719.92	375.0
102	373.22	522.09	522.09	746.43	400.0
105	392.59	549.63	549.63	785.18	415.0
107	405.85	567.98	567.98	811.69	435.0
111	433.38	605.71	605.71	864.72	475.0
114	452.75	635.28	635.28	906.53	525.0
117	474.17	663.84	663.84	948.34	575.0
120	494.56	694.43	694.43	991.16	622.0
122	509.86	713.80	713.80	1018.7	675.0

Additional sizes available upon request