



Green Pin Safety Dee Shackles BN: G-4153

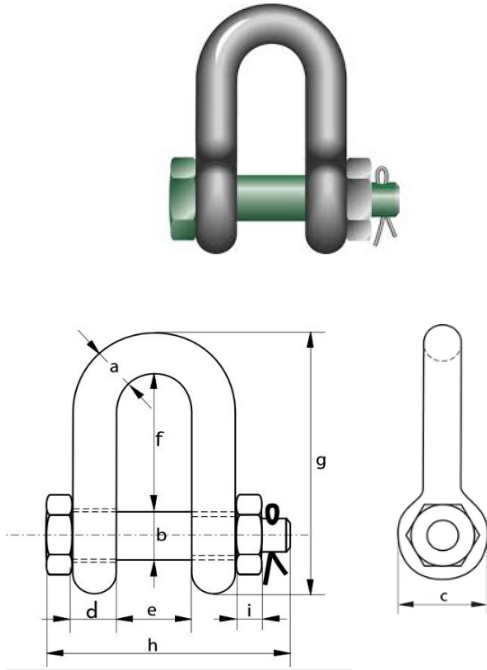

working load limit (ton)	diameter r bow (mm)	diameter r pin (mm)	diameter r eye (mm)	width eye (mm)	width inside (mm)	length inside (mm)	Length (mm)	length bolt (mm)	thickne ss nut (mm)	Net weight (kg)
	a	b	c	d	e	f	g	h	i	
2	13,5	16	34	13	22	43	82	80	13	0.39
3.25	16	19	40	16	27	51	97	98	17	0.67
4.75	19	22	46	19	31	59	112	115	19	1.08
6.5	22	25	52	22	36	73	134	130	22	1.66
8.5	25	28	59	25	43	85	154	150	25	2.46
9.5	28	32	67	28	47	90	168	166	27	3.4
12	32	35	73	32	51	94	180	184	30	4.51
13.5	35	38	79	35	57	115	209	197	33	6.1
17	38	42	88	38	60	127	230	202	19	7.63
25	45	50	104	45	74	149	271	243	23	12.9
35	50	57	112	50	83	171	306	269	26	17.4
42.5	57	65	132	57	95	190	346	301	29	25.9
55	65	70	145	65	105	203	376	329	32	35.3
85	75	83	167	75	127	229	429	381	39	53

Green Pin Screw Pin Dee Shackles SC: G-4151

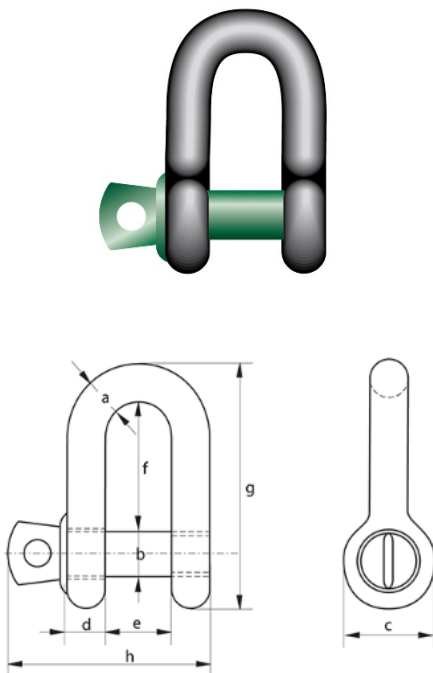

working load limit (ton)	diameter r bow (mm)	diameter r pin (mm)	diameter r eye (mm)	width eye (mm)	width inside (mm)	length inside (mm)	Length (mm)	length bolt (mm)	Net weight (kg)
	a	b	c	d	e	f	g	h	
0.33	5	6	12	5	9,5	19	33	29,5	0.02
0.5	7	8	16	7	12	22,5	41,5	38	0.05
0.75	9	10	20	9	13,5	27	51	46,5	0.09
1	10	11	23	10	17	32	59	54	0.14
1.5	11	13	25	11	19	37	67	59,5	0.19
2	13,5	16	34	13	22	43	82	73	0.32
3.25	16	19	40	16	27	51	97	89	0.54
4.78	19	22	46	19	31	59	112	103	0.87
6.5	22	25	52	22	36	73	134	119	1.34
8.5	25	28	59	25	43	85	154	137	2.08
9.5	28	32	67	28	47	90	168	153	2.77
12	32	35	73	32	51	94	180	170	3.72
13.5	35	38	79	35	57	115	209	186	5.44
17	38	42	88	38	60	127	230	203	6.85
25	45	50	104	45	74	149	271	243	11.5
35	50	57	112	50	83	171	306	272	16.9
42.5	57	65	132	57	95	190	346	310	24.6
55	65	70	145	65	105	203	376	344	32.7